


Bentonite Station for Automatic Bentonite System

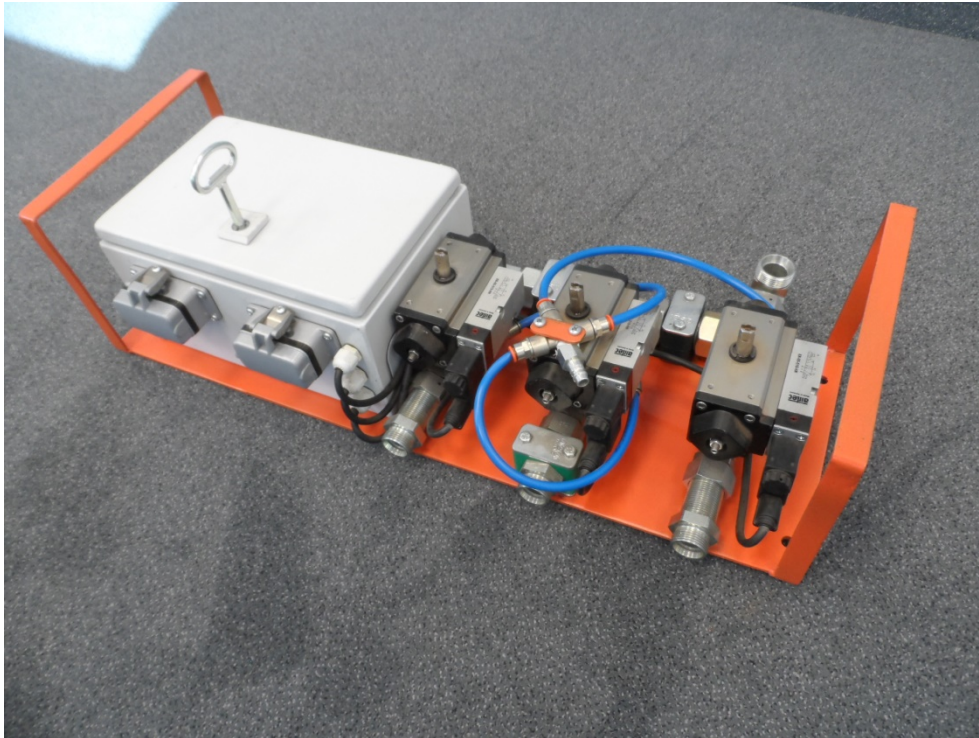

Dimensions (L/H/W) 750/250/190 mm - Weight: 25 kg

Injection station for the distribution of bentonite to 3 lubrication injection ports per pipe. Electronically controlled pneumatic for individual control of each nozzle.

Scope of supply: Lubrication injection station, control cable and air supply line. Lubrication hoses and fittings to / from the injection stations are not included.

Injection station consisting of:

- Triple spool electro pneumatic valve block
- Three channel control box
- 1 Inlet port DN24 / 28L
- 3 Outlet ports DN18 / 22L
- Control cable, Single length 25m
- Air supply hoses, Single length 25m